

01-07-00

A



# IN THE UNITED STATES PATENT AND TRADEMARK OFFICE

## CERTIFICATE OF MAILING

This transmittal and the documents and/or fees itemized hereon and attached hereto have been deposited as "Express Mail Post Office to Addressee" in accordance with 37 C.F.R. § 1.10 with Express Mail Mailing Label Number EL302635146US

Attorney Docket No. **DVDOP015**

First Named Inventor:

THOMPSON, Laurence A.



## UTILITY PATENT APPLICATION TRANSMITTAL (37 CFR § 1.53(b))

Assistant Commissioner for Patents  
Box Patent Application  
Washington, DC 20231

☐ Duplicate for  
fee processing

Sir: This is a request for filing a patent application under 37 CFR § 1.53(b) in the name of inventors:  
**Laurence A. Thompson**

For: **AUDIO SIGNAL DELAY APPARATUS AND METHOD**

### Application Elements:

- ☒ 17 Pages of Specification, Claims and Abstract  
☒ 06 Sheets of Informal Drawings  
☐ 02 Pages Combined Declaration and Power of Attorney

### Accompanying Application Parts:

- ☐ Assignment and Assignment Recordation Cover Sheet (recording fee of \$40.00 enclosed)  
☐ 37 CFR 3.73(b) Statement by Assignee  
☐ Information Disclosure Statement with Form PTO-1449  
☐ Copies of IDS Citations  
☐ Preliminary Amendment  
☒ Return Receipt Postcard  
☐ Small Entity Statement(s)  
☐ Other:

### Fee Calculation (37 CFR § 1.16)

	(Col. 1) NO. FILED	(Col. 2) NO. EXTRA	SMALL ENTITY RATE	OR	LARGE ENTITY RATE
BASIC FEE			\$380	OR	\$760
TOTAL CLAIMS	34	-20 = 14	x09 = \$	OR	x18 = \$
INDEP CLAIMS	02	-03 = 00	x39 = \$	OR	x78 = \$
[ ] Multiple Dependent Claim Presented			\$130 = \$	OR	\$260 = \$
* If the difference in Col. 1 is less than zero, enter "0" in Col. 2.			Total \$	OR	Total \$

☐ Check No. in the amount of **\$ 40.00** is enclosed.

☒ The Commissioner is authorized to charge any fees beyond the amount enclosed which may be required, or to credit any overpayment, to Deposit Account No. 50-0384 (Order No. DVDOP015).

General Authorization for Petition for Extension of Time (37 CFR §1.136)


☒ Applicants hereby make and generally authorize any Petitions for Extensions of Time as may be needed for any subsequent filings. The Commissioner is also authorized to charge any extension fees under 37 CFR §1.17 as may be needed to Deposit Account No. 50-0384 (Order No. DVDOP015).

☒ Please send correspondence to the following address:

HICKMAN STEPHENS COLEMAN & HUGHES, LLP  
P.O. Box 52037  
Palo Alto, CA 94303-0746

Tel (650) 470-7430  
Fax (650) 470-7440

Date: 1/5/00

  
\_\_\_\_\_  
**Douglas E. Mackenize**  
Registration No. 38,955

# AUDIO SIGNAL DELAY APPARATUS AND METHOD

By Inventor:

Laurence A. Thompson

5

## FIELD OF THE INVENTION

The present disclosure relates to video and audio circuits and more particularly to circuits that provide a delay in an audio signal and further to circuits that synchronize  
10 audio signals with video signals.

## BACKGROUND OF THE INVENTION

Household video technology began decades ago with an analog station-  
15 transmitted video signal, a roof top antenna, and a three channel black and white television set in a living room. Since then, video technology has experienced rapid growth due to advances in microprocessor, communications, and digital signal processing technology. In addition to the standard television, the video market has expanded to include video cassette recorders (VCR), multiple providers of satellite television, digital  
20 cable, video on-demand cable, digital television, hi-definition television, overhead projection television, home movie theaters, camcorder video units and many other video options. As technology continues to develop, the list of video options available to the consumer will continue to grow as well.

25 The vast video market has led to an expansion of video formats currently in use by these different products. In fact, some products have more than one video format. For example, digital television transmission has been approved and is in operation in the United States. The standard for digital television includes 18 new video formats.

30 The increasing number of video products and corresponding video formats has created a problem of compatibility between products. In order to experience video from

one format in another format, the video stream must be processed and transformed into the desired format. For example, to view video formatted according to the interlaced scanning scheme used in analog television standards on a computer display that uses progressive scanning, a format transformation must be performed.

5

Before this transformation occurs, a video signal and its corresponding audio signal are synchronized to temporally correspond to each other. As a result of the format transformation, the required signal processing introduces an undesirable delay in the video stream, causing the video and audio streams to be unsynchronized. That is, as a result of the transformation, conversations and sound effects in the video may not match a speaker's mouth or events as they occur. Furthermore, as signals are processed through more than one device, this delay becomes greater and more noticeable to the viewer. The transformation processing therefore requires that the video and audio signal be re-synchronized to eliminate the undesirable mismatching of the video and audio signals.

10

15

A delay introduced in the audio signal provided to synchronize the audio and video signal is dependent upon the format of the video and corresponding audio signal. As discussed above, a number of formats are used for digital video signals. These formats accommodate variable audio sampling rates and sample sizes. Furthermore, digital audio signals are commonly transported from one processing device to another within an audio/video processing product using a number of serial transmission schemes. These schemes use various methods to mark the start of a sample or determine left from right in a stereo pair. One example of such a serial audio stream is a standard known as I<sup>2</sup>S. As such, different types of digital audio signals require a different delay in order to be properly re-synchronized to their corresponding processed video signal.

20

25

Circuits that adjust an audio signal to account for the delay required by video signal processing are well known in the art. However, past solutions of the prior art consist of circuits that provide a delay in the audio signal only for video transformed from one specific format to another. In order to provide the appropriate audio delay for different video format transformations using the solutions in the prior art, several circuits

30



## SUMMARY OF THE INVENTION

5 A disclosed embodiment solves the problem of providing a delay in a digital serial audio signal corresponding to the particular format of audio signal while minimizing the required hardware. The disclosed embodiment determines the audio sample size and sample rate by comparing the frequency of the serial audio clock to a known reference frequency. It also uses the serial clock to sample the serial audio data  
10 signals. It then stores the stream of data in a memory which is configured as a circular buffer having a write pointer and a read pointer. The address space between the pointers corresponds to a particular time delay in the data, for example, as the differences in the address increases, so does the delay in reading the data relative to when it was written. The serial audio clock is then used again to output the serial audio data signals such that a  
15 delay in the serial digital audio data stream is achieved.

## BRIEF DESCRIPTION OF THE DRAWINGS

5           FIG 1 is a block diagram of the prior art providing a delay for multiple formats of digital audio signals.

FIG 2 is a block diagram of the audio delay apparatus.

10           FIG 3 is a block diagram of the audio delay circuit.

FIG 4 is a flow chart of the operation of the audio delay circuit.

FIG 5 is a block diagram of the audio format detection circuit.

15           FIG 6 is a flow chart of the operation of the audio format detection and write address generation circuit.

## DETAILED DESCRIPTION

As shown in FIG. 2, AN audio delay circuit generally designated 95 includes an input device 700, a processing device 800, and an output device 900. The input device 700 is receptive to an incoming audio signal 701. As is known in the art the audio signal may be composed of numerous separate component signals. In the present embodiment, the audio signal includes a serial data signal, a frame synchronization signal, and a clock signal. The frame synchronization signal may have many formats and variations and is referred to by different names depending upon the product provider. This disclosure uses the term “frame synchronization signal” as a broad term meant to include signals such as left and right stereo signals, single pulse signals, data packet start signals, and any other signal that marks the beginning of a packet of data in the audio signal. As is known in the art there are many terms used to label this type of signal and they are all incorporated as the term frame synchronization signal is used in the present disclosure.

As shown in FIG. 3, the audio delay circuit 95 further includes a FIFO register 10, an audio format detection circuit 20, a memory controller circuit 30, a memory chip 40, a write address generator 50, a read address generator 60, a control state machine 70, and an audio data input FIFO 80.

With the reference of FIG. 4, the circuit flow generally designated 1000 generally includes an operation 100 in which data signals are input into the FIFO register 10, an operation 200 in which data signals are stored in a memory circuit, an operation 300 in which the audio signal format is detected, an operation 400 in which the audio signal delay is implemented according to the audio signal's detected format, an operation 500 in which the data signals are retrieved from memory, and an operation 600 in which the data signals are output with the proper delay implemented.

The operation of the audio delay circuit 95 as shown in FIG 3 will now be described. Circuit operation begins with the Audio Data Input FIFO 10 receiving the



data signal clock and accompanying data signals. In a preferred embodiment, the data signals received are a serial data signal through data line 2, a frame synchronization signal through data line 4, and an audio clock signal through data line 6. Packets of data or frames from the data signals accompanying the audio clock signal are loaded into the FIFO register 10. The size of FIFO register 10 is determined by the requirements of the memory system and the highest data flow rate to be accommodated and is generally unrelated to any specific digital serial audio format. The FIFO register 10 performs serial to parallel conversion of the digital serial audio data and provides temporary storage of the data until a memory write cycle is requested. When FIFO register 10 is full, the FIFO register 10 sends a FIFO full signal to the control state machine 70 through FIFO full data line 14.

Upon receiving the FIFO full signal, the control state machine 70 sends a write request to the memory controller 30 through read/write request data line 72. Upon receiving this request, the memory controller 30 puts the request in a queue (not shown) and when other memory transactions are complete, the memory controller 30 sends a signal to the input FIFO register 10 which causes the FIFO register 10 to drive its contents into the memory data bus 42 and into memory chip 40 under control of the memory controller 30 using control and address signals 44.

The format detection process will now be described. The format of the audio signal is detected by the audio format detection circuit 20 shown in FIG 3. The audio format detection circuit 20 is depicted in more detail in FIG. 5 and its operation is shown in the flow chart of FIG 6. As shown in FIG 5, the circuit 20 includes a divide-by-constant-counter 210, which in the preferred embodiment has a constant of 16, clocked by the audio shift clock (SCK) 8, a circuit 220 to synchronize the divide-by-constant signal to a 27 MHz clocking domain, a counter 230 clocked by 27 MHz, a latch 240 to store the previous state of the counter 230, a comparing circuit 250 containing comparators 251 through 258 which compare the stored count to predetermined values, a lookup memory circuit 260, a write address latch 270, and a comparator 280.

With the reference of FIG. 6, the format detection circuit flow generally designated 300 generally includes an operation 310 in which the frequency of the audio shift clock is divided by a constant which in the preferred embodiment is equal to 16 to create a SCK/16 signal, an operation 320 in which the SCK/16 and 27 MHz clock are synchronized and edge detection occurs, an operation 330 in which the SCK/16 clears a counter and enables a latch to store the previous count, an operation 340 in which the latched count is compared to constants, the result of the comparison used to select a Write Address, an operation 350 in which a write address is latched, an operation 360 in which the current and last Write Address are compared, an operation 380 in which no action is required if the last and current Write Address are equal, and an operation 390 in which the Read Address Pointer is initialized and the current Write Address is loaded into the Write Address Pointer.

The audio format detection circuit 20 receives the audio clock signal (SCK) through data line 8 and a reference clock signal through data line 21. The SCK input clocks a 4 bit counter 210, which generates a timing signal on data line 212 whose frequency is equal to SCK/16. This signal is sent through a synchronization and edge detection circuit 220, where it is synchronized to the 27MHz clock domain. The output of the synchronizer 220 is a pulse on data line 214 whose frequency is nominally equal to SCK/16 and whose pulse width is equal to one period of the 27MHz clock. This pulse becomes a master timing signal. The following events occur once per period of this master timing signal.

The timing pulse clears a counter 230 which is clocked by 27MHz. The pulse also enables a latch 240 which stores the previous state of the counter 230. The latch 240 now contains a binary number corresponding to the number of cycles of the 27MHz clock that occurred in the period SCK/16.

Comparators 251 through 258 compare the contents of the latch 240 to eight constant values which correspond to various SCK frequencies. The results of the comparisons are used to select one of eight predetermined Write Address values which is

captured in latch 270 such that the Write Address calculated in the previous period is compared to the Write Address calculated in the current period by the comparator 280.

If the Previous and Current Write Address values are equal, then the frequency of the SCK has not changed and no further action is required. However, if the Previous and Current Write Addresses are not equal, then the SCK frequency has changed, and the memory Read and Write Pointers must be initialized. The Read Address pointer is initialized with a constant, and the Write Address pointer is initialized with the Current Write Address calculated as described above. It will be apparent to one skilled in the art that the operations described thus far may be accomplished in a variety of ways, including but not limited to initializing the Write Address pointer with a constant and initializing the Read Address with a constant correlating to the detected format of the audio signal.

The delay for the audio signal is implemented by configuring a memory register (not shown) within the memory controller 30 corresponding to the detected format of the sampled audio clock signal. As described above, each constant value within the comparator circuit 250 referenced above corresponds to an offset value. This offset value is used to configure an address pointer that then configures the memory register. The memory register, configured by the address pointer corresponding to the detected format, forms the delay required by the particular audio format. The memory register is defined with a first parameter and a second parameter. In one embodiment, the memory register is a buffer (not shown), the first parameter is a write address pointer and second parameter is a read address pointer. The write address offset information is provided by the audio format detection circuit 20 through data line 22 to the write address generator circuit 50.

Next, the memory controller 30 configures a write address pointer and a read address pointer. Information for these pointers is provided from the write address generator circuit 50 through data line 52 and the read address generator circuit 60 through data line 62. When the memory controller 30 receives the write address generator

information, it resizes the buffer according to the configured write address and the read address pointers. The memory controller 30 then implements the delay corresponding to the resized buffer.

5           The memory controller 30 sends a control signal on data line 44 to the memory chip 40 to send the stored data signal and frame synchronization signal through the memory data bus 42. The memory controller 30 then reads the signals sent over the data bus 42. If the audio data input FIFO 80 is presently empty, a FIFO empty signal is sent from the FIFO register 80 to the control state machine 70 through data line 82. In  
10   response to this signal, the control state machine 70 sends a read request signal through data line 72 to the memory controller 30. Upon receiving this request, the memory controller 30 puts the request in a queue (not shown), completes other memory transactions, and finally sends a signal to the memory chip 40 using data line 44 which causes data to be read from the memory chip 40 and written to the input FIFO 80 under  
15   control of the memory controller 30. The input FIFO 80 then performs a parallel to serial conversion and sends its contents to outputs through data lines 84, 86 and 88 under control of the Serial Audio Clock (SCK).

          In use, the disclosed circuit 90 provides for a delay in the audio signal  
20   corresponding to the particular format of audio signal while minimizing the required hardware. The disclosed embodiment determines the audio sample size and sample rate by comparing the frequency of the serial audio clock to a known reference frequency. It also uses the serial clock to sample the serial audio data signals. It then stores the stream of data in a memory which is configured as a circular buffer having a write pointer and a  
25   read pointer. The serial audio clock is then used again to output the serial audio data signals such that a delay in the serial digital audio data stream is achieved.

          Having thus described illustrative embodiments of the invention, it will be apparent that various alterations, modifications and improvements will readily occur to  
30   those skilled in the art. Such obvious alterations, modifications and improvements, though not expressly described above, are nonetheless intended to be implied and are

within the spirit and scope of the invention. Accordingly, the foregoing discussion is intended to be illustrative only, and not limiting; the invention is limited and defined only by the following claims and equivalents thereto.

1. A method of determining a value of a function  $f(x)$  at a point  $x$  on a curve  $C$  in a space  $S$ , the method comprising:  
 (a) determining a set of points  $\{x_1, x_2, \dots, x_n\}$  on the curve  $C$  such that the points are distributed uniformly along the curve;  
 (b) determining the values of the function  $f(x_i)$  at each of the points  $x_i$  for  $i = 1, 2, \dots, n$ ;  
 (c) determining the average value of the function  $f(x)$  over the set of points  $\{x_1, x_2, \dots, x_n\}$ ;  
 (d) determining the value of the function  $f(x)$  at the point  $x$  by interpolating the average value determined in (c) and the values of the function  $f(x_i)$  determined in (b).

## CLAIMS

*What is claimed is:*

- 5 1. An apparatus for delaying an audio signal comprising:  
an input device receptive to an audio signal having one of a plurality of formats;  
a processing device coupled to the input device, the processing device configured  
for providing a delay in the audio signal corresponding to the format of the audio signal;  
and  
10 an output device coupled to the processing device, the output device configured to  
output the audio signal with the delay corresponding to the format of the audio signal.
- 15 2. The apparatus as claimed in claim 1, wherein the audio signal further comprises a  
serial audio clock signal and a plurality of accompanying signals.
3. The apparatus as claimed in claim 2, wherein the accompanying signals further  
comprises a data signal and a frame synchronization signal.
- 20 4. The apparatus as claimed in claim 2, wherein the accompanying signals are  
loaded into a register.
5. The apparatus as claimed in claim 4, wherein the register is a FIFO register.
- 25 6. The apparatus as claimed in claim 4, wherein the accompanying signals are stored  
in a memory device.
- 7 The apparatus as claimed in claim 6, wherein the memory device further  
comprises a memory controller and a memory chip.

8. The apparatus as claimed in claim 1, wherein the processing device further comprises an audio format detection device operable to detect the format of the audio signal.

9. The apparatus as claimed in claim 8, wherein the audio format detection device is operable to detect a number of edge transitions in the serial audio clock signal and provide a corresponding detected count.

10. The apparatus as claimed in claim 9, wherein the audio format detection device further comprises a plurality of model data, wherein each model data represents one of the plurality of audio signal formats and a corresponding one of a plurality of delay data, wherein the detected count is compared to the model data, the audio format detection device operable to provide the delay data representing the model data that is equal to the detected count.

11. The apparatus as claimed in claim 10, wherein the processed clock signal is synchronized to a reference clock.

12. The apparatus as claimed in claim 8, wherein the audio format detection device is operable to provide a processed clock signal by dividing the serial audio clock signal by a constant.

13. The apparatus according to claim 12, wherein the processing device is operable to compare a new delay data to an old delay data, the processing device operable to reconfigure a buffer if the new delay data is not equal to the old delay data.

14. The apparatus as claimed in claim 10, wherein the detected count is compared to the model data by a plurality of comparators.

15       The apparatus as claimed in claim 10, wherein the provided delay data is a first offset value, the processing device operable to resize a write address pointer with the offset value.

5       16.     The apparatus as claimed in claim 10, wherein the provided delay data is a second offset value, the processing device operable to resize a read address pointer with the offset value.

10       17.     The apparatus as claimed in claim 10, wherein the processing device further comprises a memory unit to provide the delay corresponding to the delay data.

18.     The apparatus as claimed in claim 15, wherein the processing device further comprises a first parameter and a second parameter, the first parameter configured according to the provided delay data.

15       19.     The apparatus as claimed in claim 18, wherein the first parameter is a write address parameter, the second parameter is a read address parameter, and the memory unit is a buffer.

20       20.     A method for delaying an audio signal comprising the steps of:  
          receiving an audio signal having one of a plurality of formats;  
          processing the audio signal to provide a delay corresponding to the format of the received signal; and

25       providing the audio signal with the delay corresponding to the format of the signal.

21.     The method of claim 22, wherein the audio signal further comprises a serial audio clock signal and accompanying signals.



22. The method of claim 21, wherein the step of processing the audio signal further comprises the step of providing a processed serial audio clock signal, the processed serial audio clock signal provided by dividing the serial audio clock signal by a constant.

23. The method of claim 21, wherein the accompanying signals further comprise a frame synchronization signal and a data signal.

24. The method of claim 21, wherein the step of processing the audio signal further comprises the step of storing the accompanying signals in a memory device.

25. The method of claim 24, wherein the memory device further comprises a memory chip and a memory controller.

26. The method of claim 22, wherein the step of processing audio signal further comprises the step of detecting the format of the audio signal.

27. The method of claim 26, wherein the step of detecting the format of the audio signal further comprises the steps of detecting the number of edge transitions in the processed serial audio clock signal and providing a detected count.

28. The method of claim 27, wherein the step of detecting the format of the audio signal further comprises the steps of providing a plurality of model data, wherein each model data corresponds to a serial audio clock signal format, providing a plurality of delay data, wherein each delay data corresponds to a model data, comparing the detected count to the plurality of model data and providing the delay data corresponding to the model data equal to the detected count.

29. The method of claim 28, further comprising the step of comparing the detected count to the plurality of model data using comparator circuits.

30. The method of claim 28, wherein the detected count further comprises the number of edge transitions in the processed serial audio clock signal within a period, and wherein the plurality of model data include the number of edge transitions present in each processed serial audio clock signal format in the period.

5

31. The method of claim 30, wherein the step of processing the audio signal further comprises the step of providing a memory register having a first parameter and a second parameter, the memory register configured to provide a delay.

10 32. The method of claim 31, wherein the step of providing a memory register further comprises the step of providing an offset, the offset corresponding to the model data equal to the detected count and resizing the memory register by providing the offset for the first parameter.

15 33. The method of claim 32, wherein the first parameter is a write address pointer, the second parameter is a read address pointer, and the memory register is a buffer.

34. The method of claim 33, wherein the first parameter is a read address pointer, the second parameter is a write address pointer, and the memory register is a buffer.


20

## ABSTRACT OF THE DISCLOSURE


An apparatus for delaying an audio signal in conformance with the format of the audio signal. An input device is receptive to an audio signal having one of a plurality of  
5 formats. A processing device coupled to the input device is operable to provide a delay in the audio signal corresponding to the format of the audio signal. The delayed audio signal is output through an output device. An audio format detection circuit is operable to detect the number of edge transitions within a known period in a processed audio  
10 signal and thereby determine the format of the audio signal by comparing a detected edge transition count to model data representative of the plurality of formats.

11  
12  
13  
14  
15  
16  
17  
18  
19  
20  
21  
22  
23  
24  
25  
26  
27  
28  
29  
30  
31  
32  
33  
34  
35  
36  
37  
38  
39  
40  
41  
42  
43  
44  
45  
46  
47  
48  
49  
50  
51  
52  
53  
54  
55  
56  
57  
58  
59  
60  
61  
62  
63  
64  
65  
66  
67  
68  
69  
70  
71  
72  
73  
74  
75  
76  
77  
78  
79  
80  
81  
82  
83  
84  
85  
86  
87  
88  
89  
90  
91  
92  
93  
94  
95  
96  
97  
98  
99  
100  
101  
102  
103  
104  
105  
106  
107  
108  
109  
110  
111  
112  
113  
114  
115  
116  
117  
118  
119  
120  
121  
122  
123  
124  
125  
126  
127  
128  
129  
130  
131  
132  
133  
134  
135  
136  
137  
138  
139  
140  
141  
142  
143  
144  
145  
146  
147  
148  
149  
150  
151  
152  
153  
154  
155  
156  
157  
158  
159  
160  
161  
162  
163  
164  
165  
166  
167  
168  
169  
170  
171  
172  
173  
174  
175  
176  
177  
178  
179  
180  
181  
182  
183  
184  
185  
186  
187  
188  
189  
190  
191  
192  
193  
194  
195  
196  
197  
198  
199  
200  
201  
202  
203  
204  
205  
206  
207  
208  
209  
210  
211  
212  
213  
214  
215  
216  
217  
218  
219  
220  
221  
222  
223  
224  
225  
226  
227  
228  
229  
230  
231  
232  
233  
234  
235  
236  
237  
238  
239  
240  
241  
242  
243  
244  
245  
246  
247  
248  
249  
250  
251  
252  
253  
254  
255  
256  
257  
258  
259  
260  
261  
262  
263  
264  
265  
266  
267  
268  
269  
270  
271  
272  
273  
274  
275  
276  
277  
278  
279  
280  
281  
282  
283  
284  
285  
286  
287  
288  
289  
290  
291  
292  
293  
294  
295  
296  
297  
298  
299  
300  
301  
302  
303  
304  
305  
306  
307  
308  
309  
310  
311  
312  
313  
314  
315  
316  
317  
318  
319  
320  
321  
322  
323  
324  
325  
326  
327  
328  
329  
330  
331  
332  
333  
334  
335  
336  
337  
338  
339  
340  
341  
342  
343  
344  
345  
346  
347  
348  
349  
350  
351  
352  
353  
354  
355  
356  
357  
358  
359  
360  
361  
362  
363  
364  
365  
366  
367  
368  
369  
370  
371  
372  
373  
374  
375  
376  
377  
378  
379  
380  
381  
382  
383  
384  
385  
386  
387  
388  
389  
390  
391  
392  
393  
394  
395  
396  
397  
398  
399  
400  
401  
402  
403  
404  
405  
406  
407  
408  
409  
410  
411  
412  
413  
414  
415  
416  
417  
418  
419  
420  
421  
422  
423  
424  
425  
426  
427  
428  
429  
430  
431  
432  
433  
434  
435  
436  
437  
438  
439  
440  
441  
442  
443  
444  
445  
446  
447  
448  
449  
450  
451  
452  
453  
454  
455  
456  
457  
458  
459  
460  
461  
462  
463  
464  
465  
466  
467  
468  
469  
470  
471  
472  
473  
474  
475  
476  
477  
478  
479  
480  
481  
482  
483  
484  
485  
486  
487  
488  
489  
490  
491  
492  
493  
494  
495  
496  
497  
498  
499  
500  
501  
502  
503  
504  
505  
506  
507  
508  
509  
510  
511  
512  
513  
514  
515  
516  
517  
518  
519  
520  
521  
522  
523  
524  
525  
526  
527  
528  
529  
530  
531  
532  
533  
534  
535  
536  
537  
538  
539  
540  
541  
542  
543  
544  
545  
546  
547  
548  
549  
550  
551  
552  
553  
554  
555  
556  
557  
558  
559  
560  
561  
562  
563  
564  
565  
566  
567  
568  
569  
570  
571  
572  
573  
574  
575  
576  
577  
578  
579  
580  
581  
582  
583  
584  
585  
586  
587  
588  
589  
590  
591  
592  
593  
594  
595  
596  
597  
598  
599  
600  
601  
602  
603  
604  
605  
606  
607  
608  
609  
610  
611  
612  
613  
614  
615  
616  
617  
618  
619  
620  
621  
622  
623  
624  
625  
626  
627  
628  
629  
630  
631  
632  
633  
634  
635  
636  
637  
638  
639  
640  
641  
642  
643  
644  
645  
646  
647  
648  
649  
650  
651  
652  
653  
654  
655  
656  
657  
658  
659  
660  
661  
662  
663  
664  
665  
666  
667  
668  
669  
670  
671  
672  
673  
674  
675  
676  
677  
678  
679  
680  
681  
682  
683  
684  
685  
686  
687  
688  
689  
690  
691  
692  
693  
694  
695  
696  
697  
698  
699  
700  
701  
702  
703  
704  
705  
706  
707  
708  
709  
710  
711  
712  
713  
714  
715  
716  
717  
718  
719  
720  
721  
722  
723  
724  
725  
726  
727  
728  
729  
730  
731  
732  
733  
734  
735  
736  
737  
738  
739  
740  
741  
742  
743  
744  
745  
746  
747  
748  
749  
750  
751  
752  
753  
754  
755  
756  
757  
758  
759  
760  
761  
762  
763  
764  
765  
766  
767  
768  
769  
770  
771  
772  
773  
774  
775  
776  
777  
778  
779  
780  
781  
782  
783  
784  
785  
786  
787  
788  
789  
790  
791  
792  
793  
794  
795  
796  
797  
798  
799  
800  
801  
802  
803  
804  
805  
806  
807  
808  
809  
810  
811  
812  
813  
814  
815  
816  
817  
818  
819  
820  
821  
822  
823  
824  
825  
826  
827  
828  
829  
830  
831  
832  
833  
834  
835  
836  
837  
838  
839  
840  
841  
842  
843  
844  
845  
846  
847  
848  
849  
850  
851  
852  
853  
854  
855  
856  
857  
858  
859  
860  
861  
862  
863  
864  
865  
866  
867  
868  
869  
870  
871  
872  
873  
874  
875  
876  
877  
878  
879  
880  
881  
882  
883  
884  
885  
886  
887  
888  
889  
890  
891  
892  
893  
894  
895  
896  
897  
898  
899  
900  
901  
902  
903  
904  
905  
906  
907  
908  
909  
910  
911  
912  
913  
914  
915  
916  
917  
918  
919  
920  
921  
922  
923  
924  
925  
926  
927  
928  
929  
930  
931  
932  
933  
934  
935  
936  
937  
938  
939  
940  
941  
942  
943  
944  
945  
946  
947  
948  
949  
950  
951  
952  
953  
954  
955  
956  
957  
958  
959  
960  
961  
962  
963  
964  
965  
966  
967  
968  
969  
970  
971  
972  
973  
974  
975  
976  
977  
978  
979  
980  
981  
982  
983  
984  
985  
986  
987  
988  
989  
990  
991  
992  
993  
994  
995  
996  
997  
998  
999  
1000  
1001  
1002  
1003  
1004  
1005  
1006  
1007  
1008  
1009  
1010  
1011  
1012  
1013  
1014  
1015  
1016  
1017  
1018  
1019  
1020  
1021  
1022  
1023  
1024  
1025  
1026  
1027  
1028  
1029  
1030  
1031  
1032  
1033  
1034  
1035  
1036  
1037  
1038  
1039  
1040  
1041  
1042  
1043  
1044  
1045  
1046  
1047  
1048  
1049  
1050  
1051  
1052  
1053  
1054  
1055  
1056  
1057  
1058  
1059  
1060  
1061  
1062  
1063  
1064  
1065  
1066  
1067  
1068  
1069  
1070  
1071  
1072  
1073  
1074  
1075  
1076  
1077  
1078  
1079  
1080  
1081  
1082  
1083  
1084  
1085  
1086  
1087  
1088  
1089  
1090  
1091  
1092  
1093  
1094  
1095  
1096  
1097  
1098  
1099  
1100  
1101  
1102  
1103  
1104  
1105  
1106  
1107  
1108  
1109  
1110  
1111  
1112  
1113  
1114  
1115  
1116  
1117  
1118  
1119  
1120  
1121  
1122  
1123  
1124  
1125  
1126  
1127  
1128  
1129  
1130  
1131  
1132  
1133  
1134  
1135  
1136  
1137  
1138  
1139  
1140  
1141  
1142  
1143  
1144  
1145  
1146  
1147  
1148  
1149  
1150  
1151  
1152  
1153  
1154  
1155  
1156  
1157  
1158  
1159  
1160  
1161  
1162  
1163  
1164  
1165  
1166  
1167  
1168  
1169  
1170  
1171  
1172  
1173  
1174  
1175  
1176  
1177  
1178  
1179  
1180  
1181  
1182  
1183  
1184  
1185  
1186  
1187  
1188  
1189  
1190  
1191  
1192  
1193  
1194  
1195  
1196  
1197  
1198  
1199  
1200  
1201  
1202  
1203  
1204  
1205  
1206  
1207  
1208  
1209  
1210  
1211  
1212  
1213  
1214  
1215  
1216  
1217  
1218  
1219  
1220  
1221  
1222  
1223  
1224  
1225  
1226  
1227  
1228  
1229  
1230  
1231  
1232  
1233  
1234  
1235  
1236  
1237  
1238  
1239  
1240  
1241  
1242  
1243  
1244  
1245  
1246  
1247  
1248  
1249  
1250  
1251  
1252  
1253  
1254  
1255  
1256  
1257  
1258  
1259  
1260  
1261  
1262  
1263  
1264  
1265  
1266  
1267  
1268  
1269  
1270  
1271  
1272  
1273  
1274  
1275  
1276  
1277  
1278  
1279  
1280  
1281  
1282  
1283  
1284  
1285  
1286  
1287  
1288  
1289  
1290  
1291  
1292  
1293  
1294  
1295  
1296  
1297  
1298  
1299  
1300  
1301  
1302  
1303  
1304  
1305  
1306  
1307  
1308  
1309  
1310  
1311  
1312  
1313  
1314  
1315  
1316  
1317  
1318  
1319  
1320  
1321  
1322  
1323  
1324  
1325  
1326  
1327  
1328  
1329  
1330  
1331  
1332  
1333  
1334  
1335  
1336  
1337  
1338  
1339  
1340  
1341  
1342  
1343  
1344  
1345  
1346  
1347  
1348  
1349  
1350  
1351  
1352  
1353  
1354  
1355  
1356  
1357  
1358  
1359  
1360  
1361  
1362  
1363  
1364  
1365  
1366  
1367  
1368  
1369  
1370  
1371  
1372  
1373  
1374  
1375  
1376  
1377  
1378  
1379  
1380  
1381  
1382  
1383  
1384  
1385  
1386  
1387  
1388  
1389  
1390  
1391  
1392  
1393  
1394  
1395  
1396  
1397  
1398  
1399  
1400  
1401  
1402  
1403  
1404  
1405  
1406  
1407  
1408  
1409  
1410  
1411  
1412  
1413  
1414  
1415  
1416  
1417  
1418  
1419  
1420  
1421  
1422  
1423  
1424  
1425  
1426  
1427  
1428  
1429  
1430  
1431  
1432  
1433  
1434  
1435  
1436  
1437  
1438  
1439  
1440  
1441  
1442  
1443  
1444  
1445  
1446  
1447  
1448  
1449  
1450  
1451  
1452  
1453  
1454  
1455  
1456  
1457  
1458  
1459  
1460  
1461  
1462  
1463  
1464  
1465  
1466  
1467  
1468  
1469  
1470  
1471  
1472  
1473  
1474  
1475  
1476  
1477  
1478  
1479  
1480  
1481  
1482  
1483  
1484  
1485  
1486  
1487  
1488  
1489  
1490  
1491  
1492  
1493  
1494  
1495  
1496  
1497  
1498  
1499  
1500  
1501  
1502  
1503  
1504  
1505  
1506  
1507  
1508  
1509  
1510  
1511  
1512  
1513  
1514  
1515  
1516  
1517  
1518  
1519  
1520  
1521  
1522  
1523  
1524  
1525  
1526  
1527  
1528  
1529  
1530  
1531  
1532  
1533  
1534  
1535  
1536  
1537  
1538  
1539  
1540  
1541  
1542  
1543  
1544  
1545  
1546  
1547  
1548  
1549  
1550  
1551  
1552  
1553  
1554  
1555  
1556  
1557  
1558  
1559  
1560  
1561  
1562  
1563  
1564  
1565  
1566  
1567  
1568  
1569  
1570  
1571  
1572  
1573  
1574  
1575  
1576  
1577  
1578  
1579  
1580  
1581  
1582  
1583  
1584  
1585  
1586  
1587  
1588  
1589  
1590  
1591  
1592  
1593  
1594  
1595  
1596  
1597  
1598  
1599  
1600  
1601  
1602  
1603  
1604  
1605  
1606  
1607  
1608  
1609  
1610  
1611  
1612  
1613  
1614  
1615  
1616  
1617  
1618  
1619  
1620  
1621  
1622  
1623  
1624  
1625  
1626  
1627  
1628  
1629  
1630  
1631  
1632  
1633  
1634  
1635  
1636  
1637  
1638  
1639  
1640  
1641  
1642  
1643  
1644  
1645  
1646  
1647  
1648  
1649  
1650  
1651  
1652  
1653  
1654  
1655  
1656  
1657  
1658  
1659  
1660  
1661  
1662  
1663  
1664  
1665  
1666  
1667  
1668  
1669  
1670  
1671  
1672  
1673  
1674  
1675  
1676  
1677  
1678  
1679  
1680  
1681  
1682  
1683  
1684  
1685  
1686  
1687  
1688  
1689  
1690  
1691  
1692  
1693  
1694  
1695  
1696  
1697  
1698  
1699  
1700  
1701  
1702  
1703  
1704  
1705  
1706  
1707  
1708  
1709  
1710  
1711  
1712  
1713  
1714  
1715  
1716  
1717  
1718  
1719  
1720  
1721  
1722  
1723  
1724  
1725  
1726  
1727  
1728  
1729  
1730  
1731  
1732  
1733  
1734  
1735  
1736  
1737  
1738  
1739  
1740  
1741  
1742  
1743  
1744  
1745  
1746  
1747  
1748  
1749  
1750  
1751  
1752  
1753  
1754  
1755  
1756  
1757  
1758  
1759  
1760  
1761  
1762  
1763  
1764  
1765  
1766  
1767  
1768  
1769  
1770  
1771  
1772  
1773  
1774  
1775  
1776  
1777  
1778  
1779  
1780  
1781  
1782  
1783  
1784  
1785  
1786  
1787  
1788  
1789  
1790  
1791  
1792  
1793  
1794  
1795  
1796  
1797  
1798  
1799  
1800  
1801  
1802  
1803  
1804  
1805  
1806  
1807  
1808  
1809  
1810  
1811  
1812  
1813  
1814  
1815  
1816  
1817  
1818  
1819  
1820  
1821  
1822  
1823  
1824  
1825  
1826  
1827  
1828  
1829  
1830  
1831  
1832  
1833  
1834  
1835  
1836  
1837  
1838  
1839  
1840  
1841  
1842  
1843  
1844  
1845  
1846  
1847  
1848  
1849  
1850  
1851  
1852  
1853  
1854  
1855  
1856  
1857  
1858  
1859  
1860  
1861  
1862  
1863  
1864  
1865  
1866  
1867  
1868  
1869  
1870  
1871  
1872  
1873  
1874  
1875  
1876  
1877  
1878  
1879  
1880  
1881  
1882  
1883  
1884  
1885  
1886  
1887  
1888  
1889  
1890  
1891  
1892  
1893  
1894  
1895  
1896  
1897  
1898  
1899  
1900  
1901  
1902  
1903  
1904  
1905  
1906  
1907  
1908  
1909  
1910  
1911  
1912  
1913  
1914  
1915  
1916  
1917  
1918  
1919  
1920  
1921  
1922  
1923  
1924  
1925  
1926  
1927  
1928  
1929  
1930  
1931  
1932  
1933  
1934  
1935  
1936  
1937  
1938  
1939  
1940  
1941  
1942  
1943  
1944  
1945  
1946  
1947  
1948  
1949  
1950  
1951  
1952  
1953  
1954  
1955  
1956  
1957  
1958  
1959  
1960  
1961  
1962  
1963  
1964  
1965  
1966  
1967  
1968  
1969  
1970  
1971  
1972  
1973  
1974  
1975  
1976  
1977  
1978  
1979  
1980  
1981  
1982  
1983  
1984  
1985  
1986  
1987  
1988  
1989  
1990  
1991  
1992  
1993  
1994  
1995  
1996  
1997  
1998  
1999  
2000  
2001  
2002  
2003  
2004  
2005  
2006  
2007  
2008  
2009  
2010  
2011  
2012  
2013  
2014  
2015  
2016  
2017  
2018  
2019  
2020  
2021  
2022  
2023  
2024  
2025  
2026  
2027  
2028  
2029  
2030  
2031  
2032  
2033  
2034  
2035  
2036  
2037  
2038  
2039  
2040  
2041  
2042  
2043  
2044  
2045  
2046  
2047  
2048  
2049  
2050  
2051  
2052  
2053  
2054  
2055  
2056  
2057  
2058  
2059  
2060  
2061  
2062  
2063  
2064  
2065  
2066  
2067  
2068  
2069  
2070  
2071  
2072  
2073  
2074  
2075  
2076  
2077  
2078  
2079  
2080  
2081  
2082  
2083  
2084  
2085  
2086  
2087  
2088  
2089  
2090  
2091  
2092  
2093  
2094  
2095  
2096  
2097  
2098  
2099  
2100  
2101  
2102  
2103  
2104  
2105  
2106  
2107  
2108  
2109  
2110  
2111  
2112  
2113  
2114  
2115  
2116  
2117  
2118  
2119  
2120  
2121  
2122  
2123  
2124  
2125  
2126  
2127  
2128  
2129  
2130  
2131  
2132  
2133  
2134  
2135  
2136  
2137  
2138  
2139  
2140  
2141  
2142  
2143  
2144  
2145  
2146  
2147  
2148  
2149  
2150  
2151  
2152  
2153  
2154  
2155  
2156  
2157  
2158  
2159  
2160  
2161  
2162  
2163  
2164  
2165  
2166  
2167  
2168  
2169  
2170  
2171  
2172  
2173  
2174  
2175  
2176  
2177  
2178  
2179  
2180  
2181  
2182  
2183  
2184  
2185  
2186  
2187  
2188  
2189  
2190  
2191  
2192  
2193  
2194  
2195  
2196  
2197  
2198  
2199  
2200  
2201  
2202  
2203  
2204  
2205  
2206  
2207  
2208  
2209  
2210  
2211  
2212  
2213  
2214  
2215  
2

AUDIO  
INPUT DATA SIGNAL  
OF FORMAT A

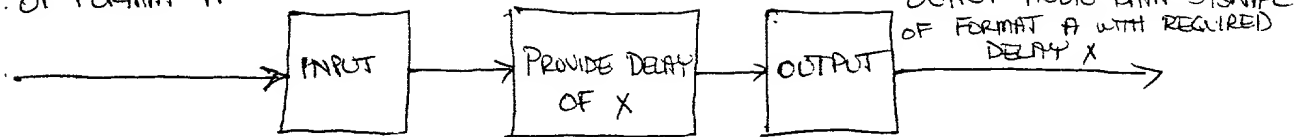

INPUT AUDIO DATA  
SIGNAL OF FORMAT B

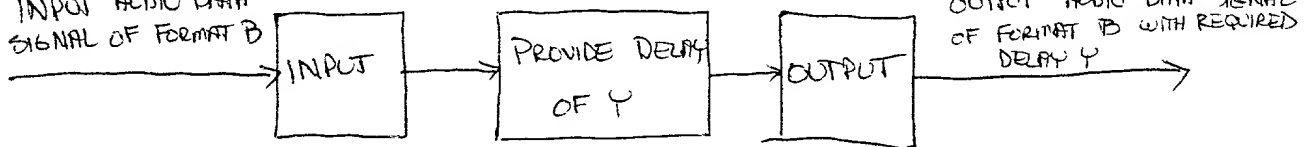

INPUT AUDIO DATA  
SIGNAL OF FORMAT C

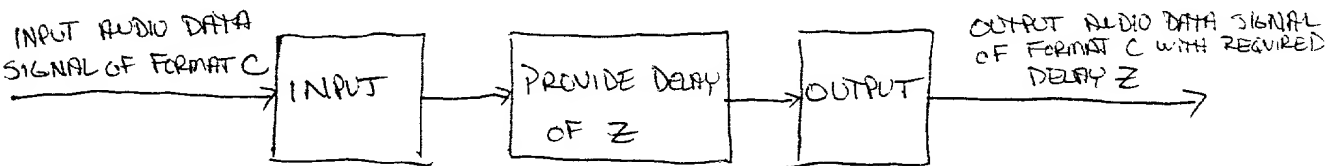


FIG. 1

PRIOR ART

95


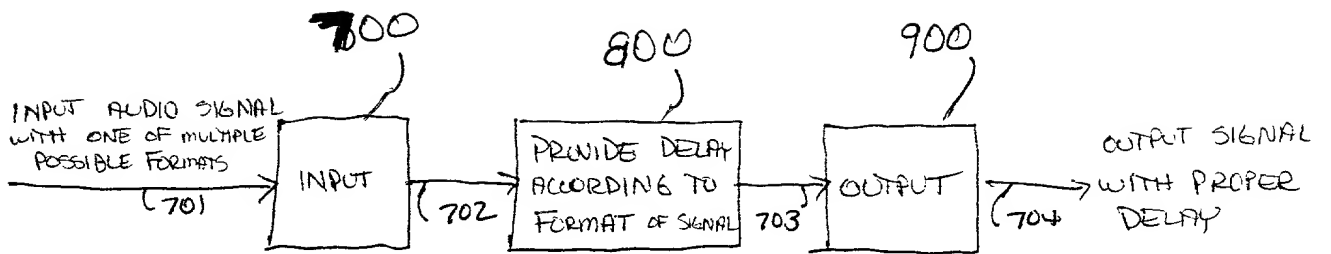


FIG. 2

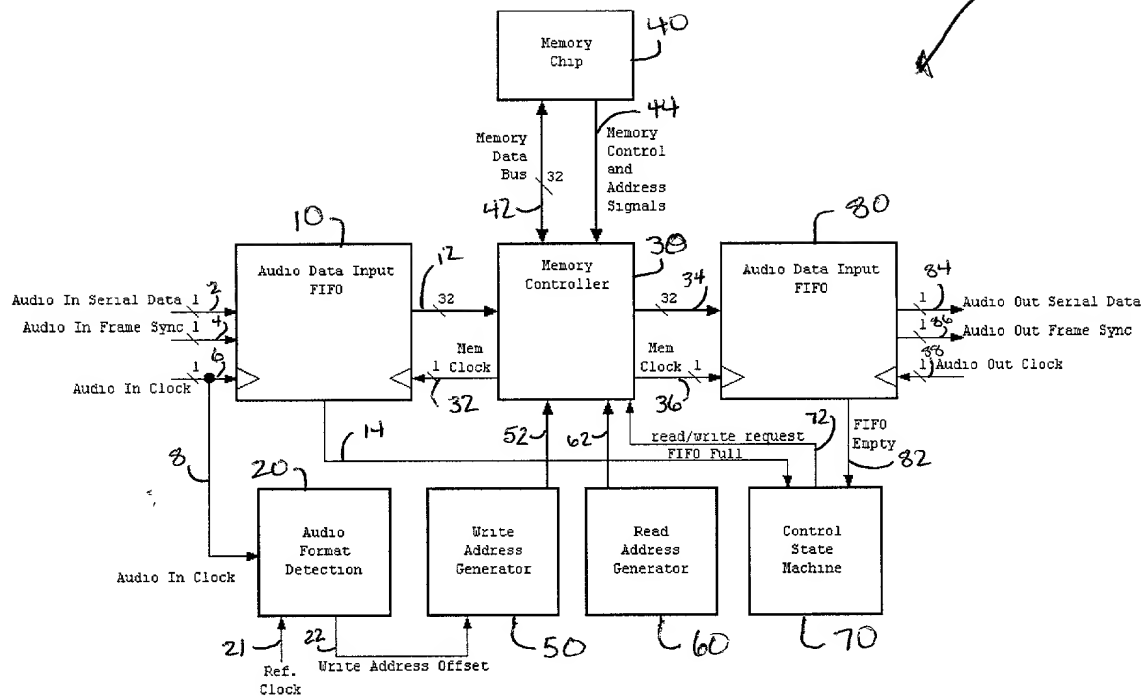

Audio Delay Circuit Block Diagram  
 L. Thompson 12/2/99  
 DVDO, Inc. Confidential

FIG. 3

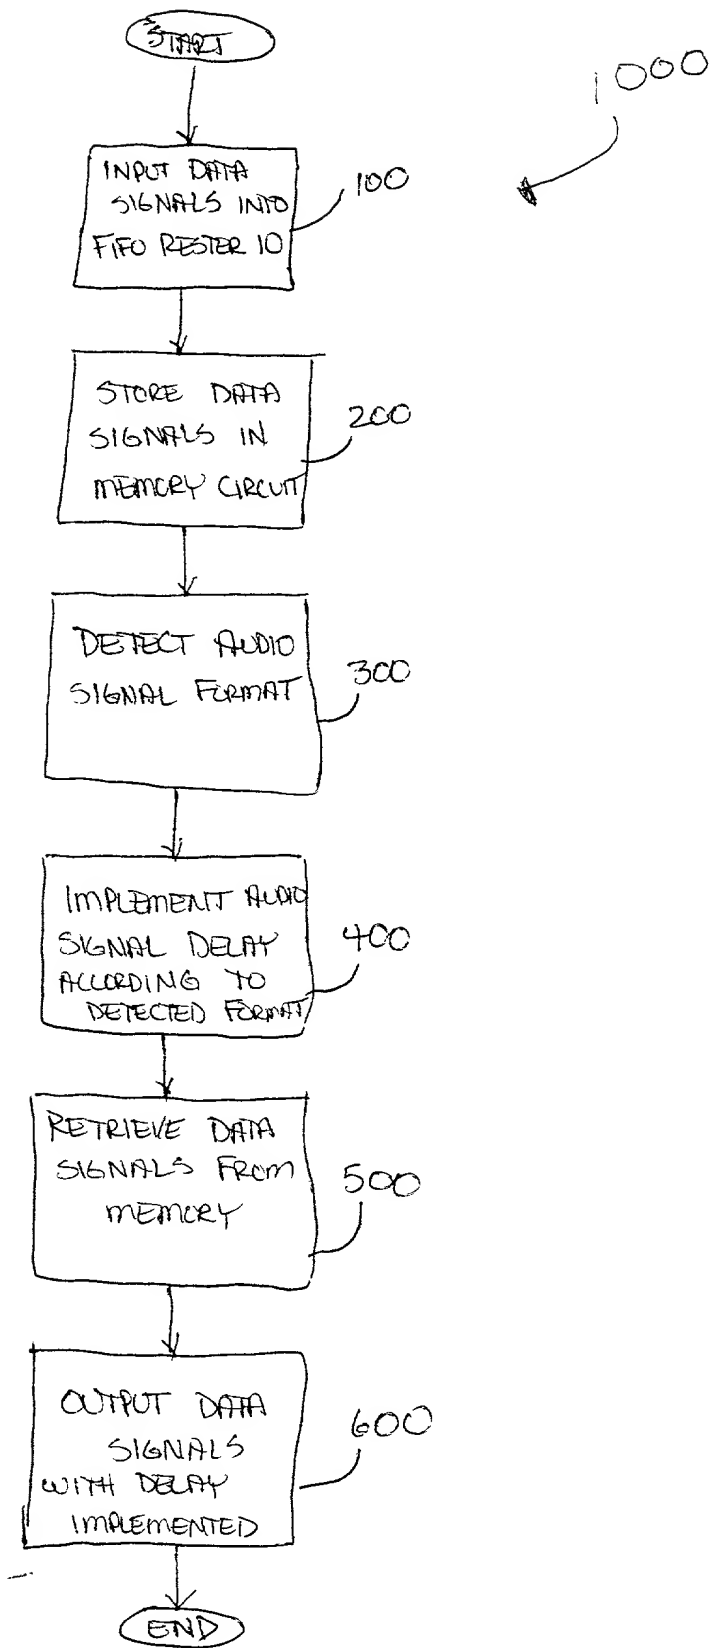


FIG. 4

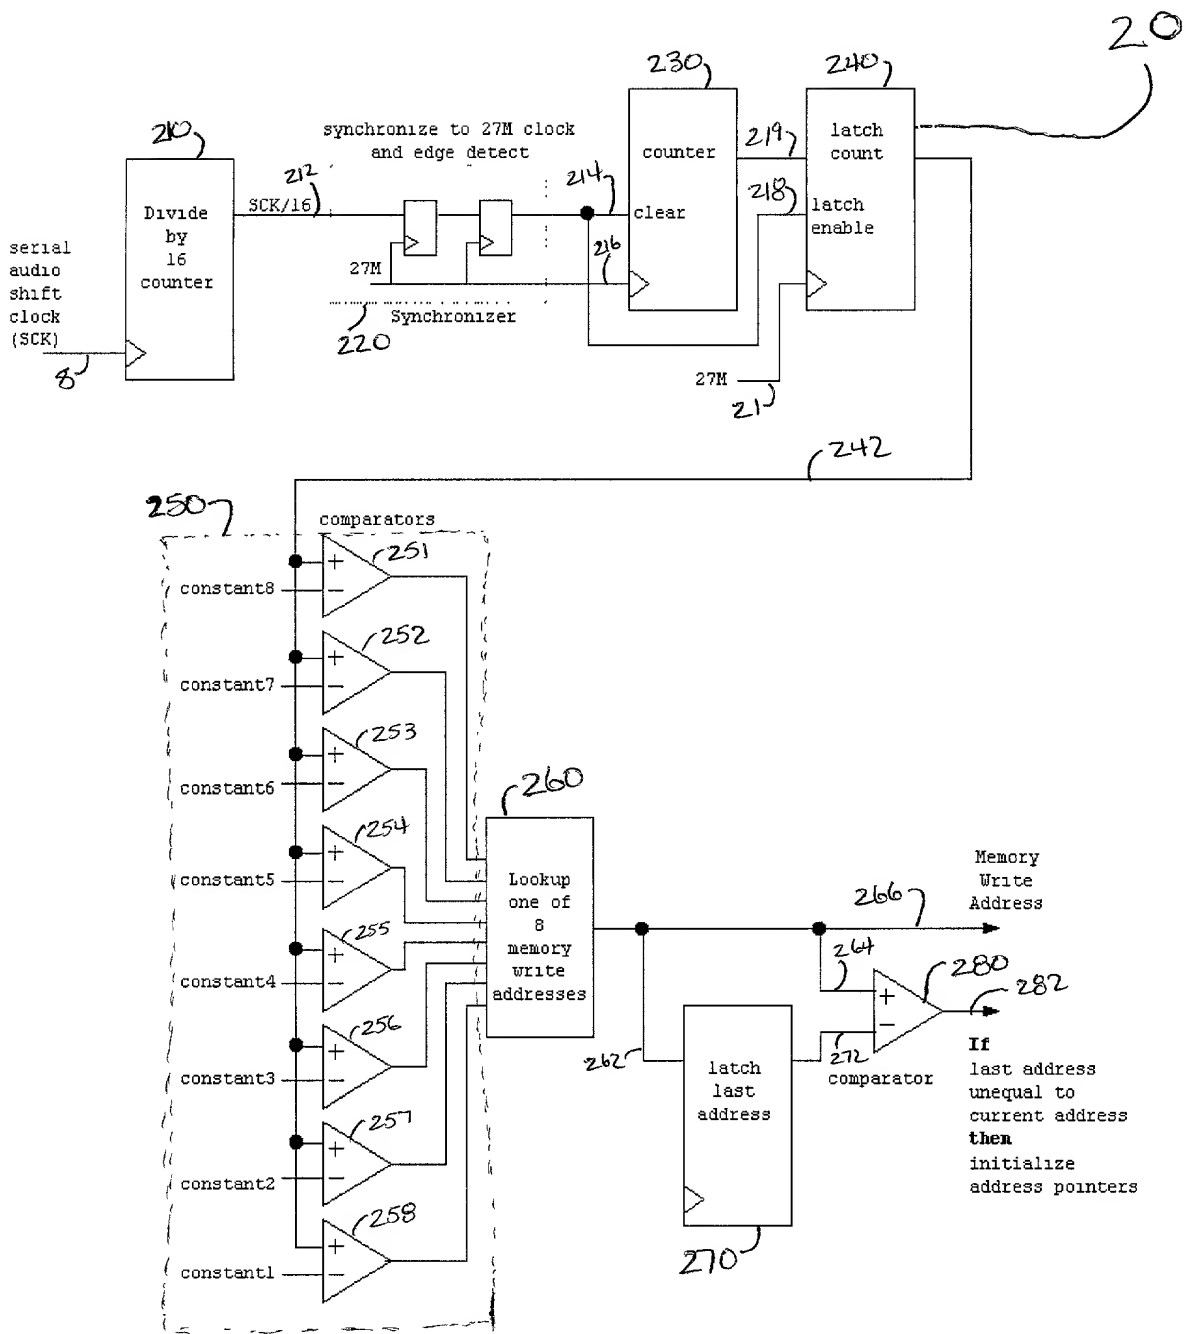


FIG. 5



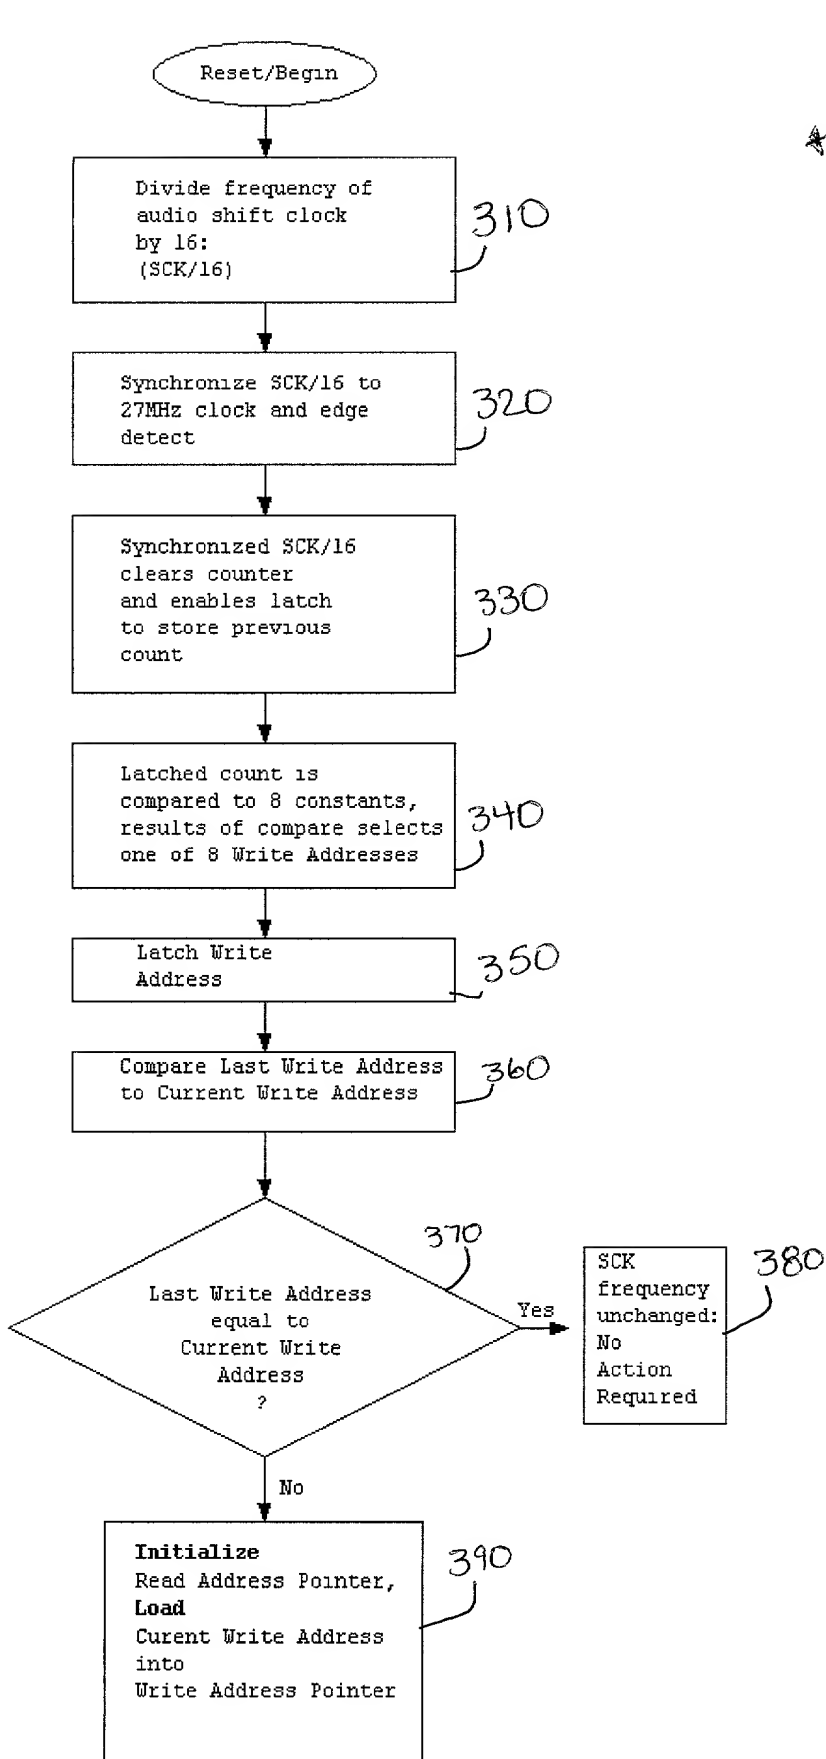


FIG. 6